

# IS-950R3NPD8

## 950W 80 Plus PS2 Mini Redundant Power Supply



### Features

- Universal Input, Active PFC
- MTBF > 100,000 Hours
- SCP (Short Circuit Protection)
- OCP (Over Current Protection)
- OVP (Over Voltage Protection)
- Power Failure Alarm & Signals
- High Efficiency 80% minimum
- PMBus Support

### Specifications

Model Number	Efficiency
IS-950R3NPD8	80% Min
RoHS Compliance	Connector Type
YES	Main Connector :: 24 pin/ 4+4pin 12V :: 1/ 8pin EPS 12V :: 1/ Molex :: 10 Floppy :: 2
Output Wattage	Dimensions (WxHxD)
950	Width 5.91" ( 150.1 mm ) Height 3.39" ( 86.1 mm ) Depth 11.42" ( 290.1 mm )


### Front View



### Side View





### Rear View

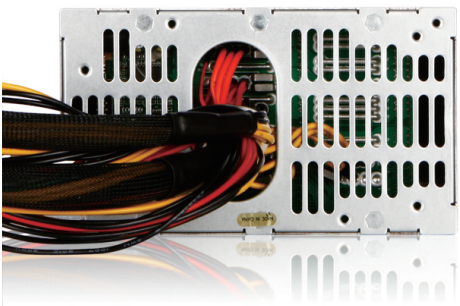

We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.

## Dimensions

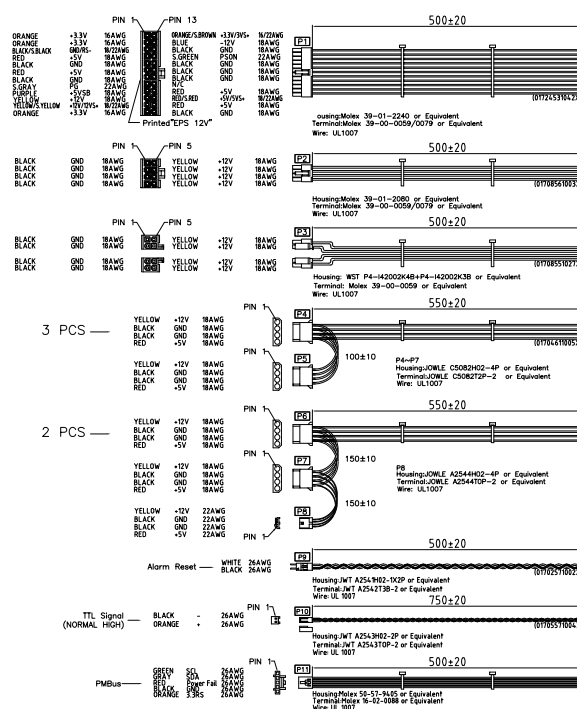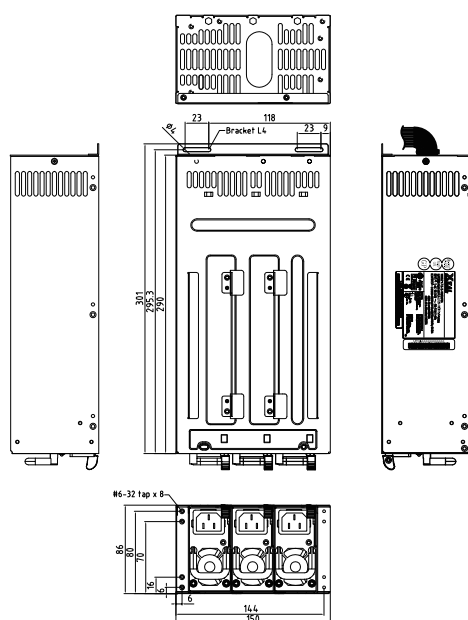

## Compatible Chassis

\* Please visit our website [www.istarusa.com/en/xeal](http://www.istarusa.com/en/xeal) for a full list of compatible chassis

## Optional Accessories

Accessory	Description
IS-500E	500W Redundant Power Supply Module for IS-500R2UPD8/ IS-950R3KPD8/ IS-950R3NPD8

## Output Rating

Voltage	Minimum Load	Maximum Load
+3.3V	1A	30A
+5V	1A	40A
+12V	2A	68A
-12V	0A	0.5A
+5VSB	0.1	3A